

Indirect Fired Heater - 2000

Indirect Fired Heater - 2000



Applications:


- Job Site/Construction Heat
- Building Heat
- Temporary Shelter
- Industrial Heat
- Commercial/Institutional Heating
- 100% Fume Free
- Natural Gas, Propane or Fuel Oil

SPECIFICATIONS

Capacity Gross	700,000 btu
Capacity Net	615,000 btu
Air Volume	6,500 cfm
Outlet Hose Diameter	20"
Inlet Hose Diameter	20"
Flue Connection	8"
Voltage	240 V/1 phase
Frequency Hz	60
Current	18 amps

Fuel Consumption	NG 675 CFH - LP 7 GPH
Fuel	NG/LP/Fuel Oil
Decibel Rating	77.5
Weight	1,320 lb
Dimensions	94.5" x 32" x 54"
Efficiency	88%
Pressure	1.7" NG
Outlet Temp	170° F
Heat Rise	130° F
Static Pressure	2.4
Nozzle	3.7 NG

- High efficiency heat exchanger (92%).
- Weather resistant & lockable casing.
- High pressure fan for powerful heat distribution.

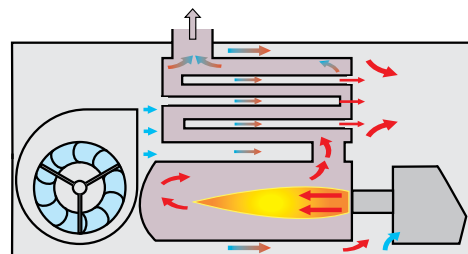

100% clean and dry heat
Outlet temperature circa 104-158°F
Large heat throw

- Combustion chamber heat resistant up to 850°C.